

## Instructions for Rapidminer

Subdirectory “H\_and\_I Document - Consistency” → “DIPCAT” contains a working Rapidminer process. There is an explanation for the case study in the general Word document.

### Installation:


- install Rapidminer Studio (<https://rapidminer.com/products/studio>)
- installation guide: <https://docs.rapidminer.com/latest/studio/installation/>
- install „Text Processing“ Extension
- guide for adding extensions:  
<https://docs.rapidminer.com/latest/studio/installation/adding-extensions.html>

### Tutorials/Learning:


- You can select from the menu: “Help” --> “Tutorials” --> on the “Learn” tab choose “Step-by-Step In-Product Tutorial “ / “Get Started (1/8)” (go along the first tutorial lectures)
- or
- go to  
<https://academy.rapidminer.com/learning-paths/get-started-with-rapidminer-and-machine-learning>

### Load our process:


- You must tell the computer where it can find the Rapidminer Codes.  
To do this create a new “Repository”

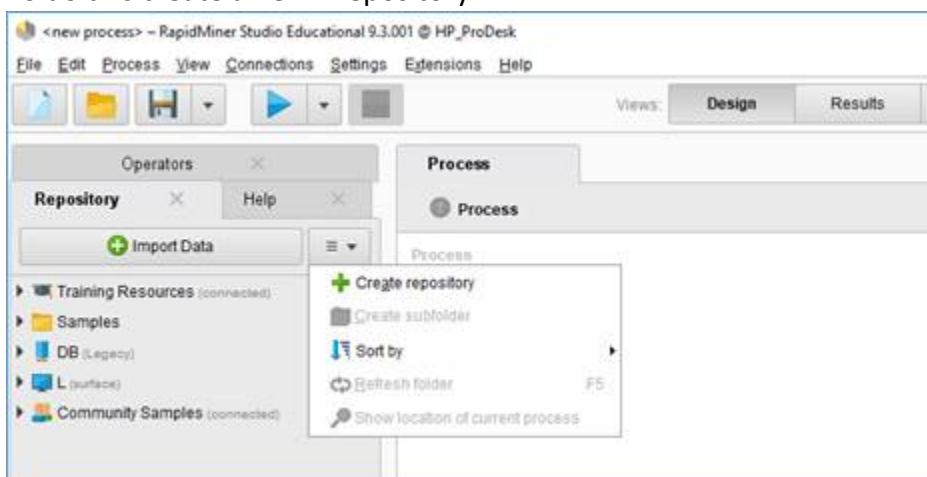


- Make it a new LOCAL repository (NOT in the cloud):

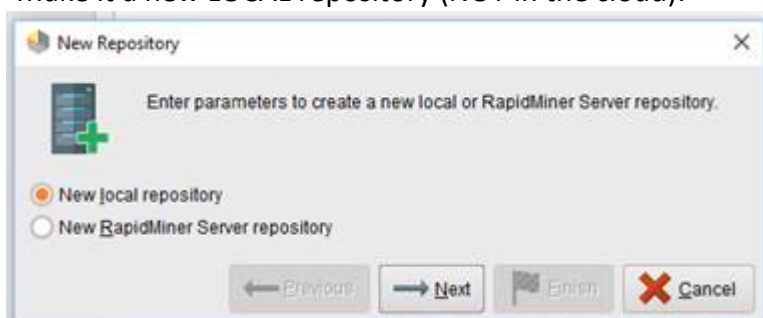

- Do NOT click “Use standard location”, but tell the computer where the subdirectory “DIPCAT” with your process files are:

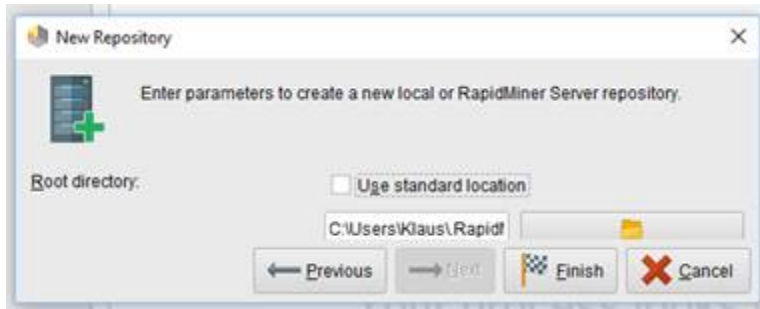

- You might need to “Refresh Folder” with a click-right (or F5) on your new Repository to make files appear (or restart Rapidminer):

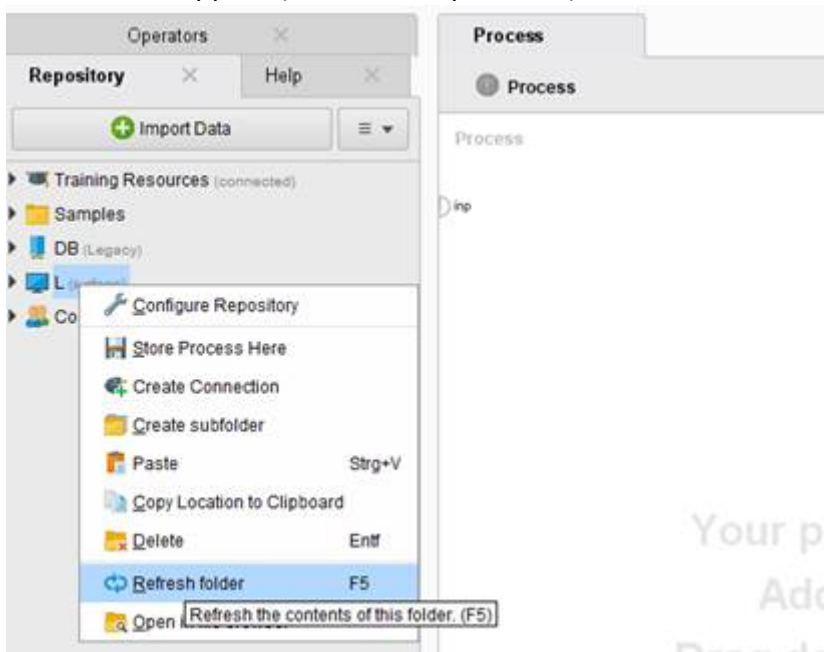

### Running the process (i.e. the program):

- Double-click on the processes opens them.
- Run the process by pressing the play symbol (little triangle).
- In the parameters have to change the location of the directory where you stored the contract files. Otherwise you will get an error message. --> please see instructions in the yellow fields.